


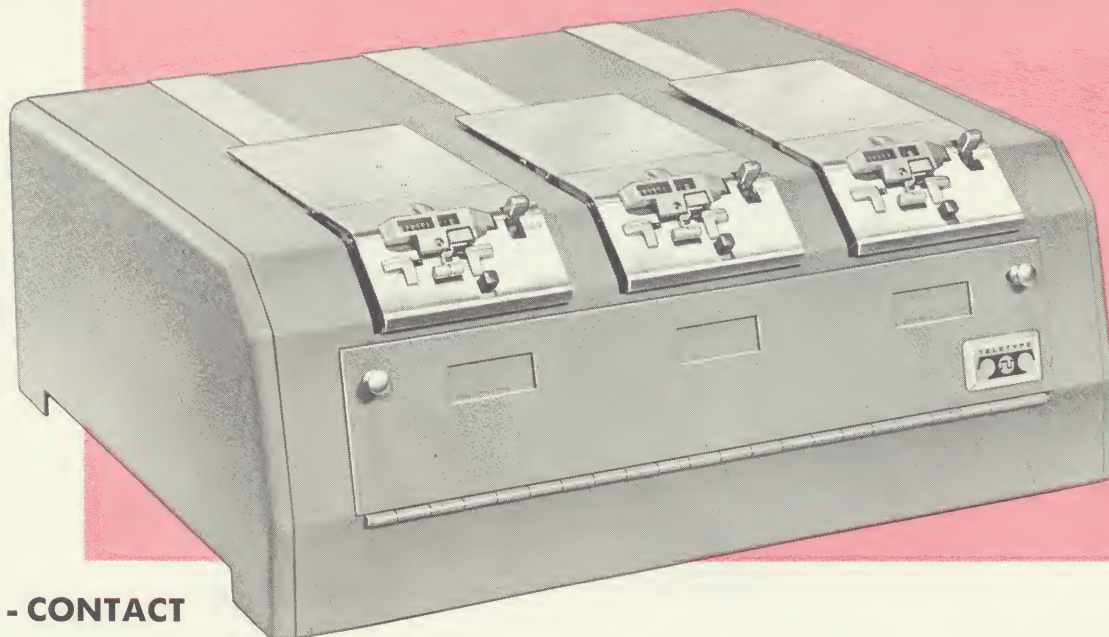

SINGLE - CONTACT

MULTIPLE TAPE READER (Type LXD)

Transmits to several machines simultaneously

Optional code contacts for parallel-wire output

"Flip-flop" action transmits several messages in sequence

Reads either partially or fully punched tapes

The Model 28 Multiple Transmitter-Distributor is an expanded version of the standard, Teletype LXD tape reading unit. Similar components are incorporated into the multiple set, all driven by one motor.

This unit translates 5 level punched tapes into serial line signals, and sends them to one or more receiving locations. Optional code reading contacts are available for parallel-wire output.

When used with automatic message numbering systems, an optional "flip-flop" feature makes it possible to number messages in the order in which they are sent.

The reader's three reading heads may be operated at one time, feeding three different locations simultaneously. Each reader also may be operated independently.


Another method of operation is to have all three portions of the reader sending data to one location. This is accomplished by placing a different message into each of the three heads of a reader equipped with optional "flip-flop" action. Thus, as one portion of tape is completed, the second reader is switched into operation automatically. When the end of that tape is reached, the third head goes into operation. This allows the operator to prepare or gather more tapes and place them into the set without interrupting transmission.

Each of the three readers can be operated at a different speed (60, 75 or 100 words per minute) simultaneously by substituting gears mounted on the common drive shaft.

A Teletype applications engineer will be pleased to assist you in your system planning. Get in touch with him soon!



TELETYPE®
CORPORATION SUBSIDIARY OF Western Electric Company INC.

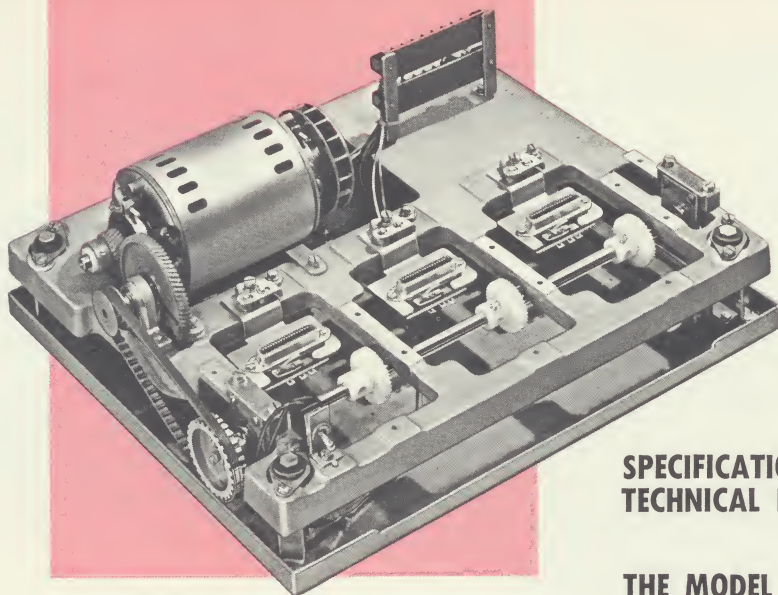

SPECIFICATIONS AND TECHNICAL DATA FOR

THE MODEL 28

Multiple LXD Tape Reader

PHYSICAL DATA:

Width— $17\frac{3}{16}$ inches Speed—60, 75 or 100 WPM.
Depth— $14\frac{1}{2}$ inches Start, stop and free-wheeling
positions on control levers.
Height— $6\frac{1}{2}$ inches Tight tape and tape-out sensing controls
built into set (1 on each reader).
Weight— $42\frac{3}{4}$ lbs.

ELECTRICAL DATA:

Clutch trip magnet— 115 volts a. c. $\pm 10\%$
120 volts d. c. $\pm 10\%$
50 volts d. c. $\pm 10\%$ with suitable
external resistance.
Signaling— 5 level, 7.42 unit, start-stop,
.020 or .060 amp.
Motor— 115 volt a. c., 60 cycle, capacitor
start, 3600 RPM, synchronous.
Terminals— Quick-disconnect, 36 terminal
connector plug.

LUBRICATION AND MAINTENANCE:

Periodic adjustments not necessary. Lubrica-
tion once every six months when set is oper-
ated at 100 words per minute, less frequently
at lower speeds.

Teletype Corporation manufactures this equipment for the
Bell System and others who require the utmost reliability
from their message and data communications systems.



TELETYPE®

CORPORATION SUBSIDIARY OF Western Electric Company INC.

GENERAL OFFICES

5555 Touhy Avenue, Skokie, Ill.
Phones: ORchard 6-1000, Skokie
COrnelia 7-6700, Chicago
Direct Distance Dialing
Area Code 312

TWX: 312-677-6700
(24-hour unattended service)

W.U. Service on premises
Telex: 02-5451

GOVERNMENT LIAISON OFFICE

425—13th Street, N.W.
Washington 4, D.C.
Phone: MEtropolitan 8-1016

Litho in U.S.A. 28 Mult. LXD10M10363—Issue 1

© 1963 by Teletype Corp.